


Stainless Steel Mounting Plate - V2+

MB-PLATE-2

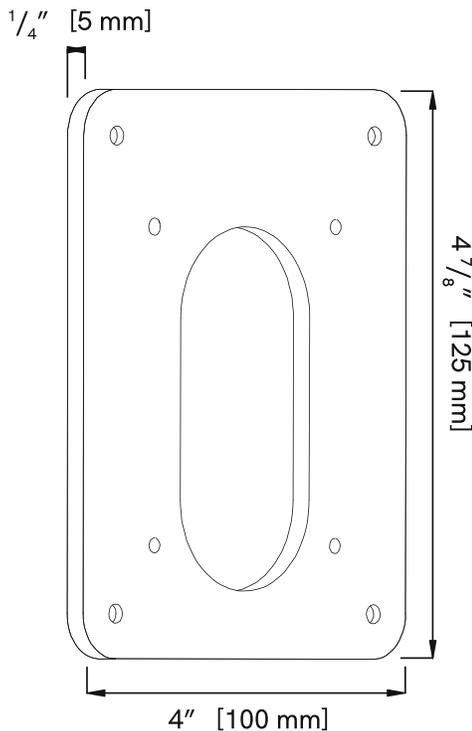

For retrofits. Great for brick and stucco and many siding types. Plate extends the mounting screws further from the entry hole—perfect for crumbling masonry or covering larger entry holes. Hydrant attaches to the mounting plate with included machine screws.

- Ideal for brick, stucco, masonry to extend screw spacing
- Covers uneven entry holes and provides a flat mounting surface
- High-quality marine-grade stainless steel
- Threaded mounting points for secure hydrant installation

Compatibility	Hydrant V2+
In the box	Mounting Plate, x5 M4.5 x 40mm counter sunk screws, x2 M4 x 10 mm Phillips machine screws, x2 M4 x 18mm Phillips machine screws
Install Required	Yes
Model	V2+
Material	Stainless Steel
Warranty	Limited Lifetime
SKU	MB-PLATE-2

Installation

1. Secure mounting plate to wall using construction adhesive or appropriate fasteners. We recommend using masonry-specific fasteners for brick, stucco, and concrete.
2. Attach hydrant to mounting plate using machine screws (included).

Note: Different screw lengths—longer screws go above. Screws should end flush with backside of plate. Hydrant cover wedge should be installed between mounting plate and hydrant.

Care & Maintenance

Gently clean with warm water and a mild liquid detergent to remove any dirt or debris. Do not use steel wool to clean stainless steel.